


Graphic Symbol

繪圖符號



Technical Data

技術參數

Max.Operating Pressure 最高壓力	Rated Flow 額定流量	Cavity-Tooling 成型孔	Installation Torque 安裝扭矩	Weight 重量
bar(psi)	(l/min)		(Nm)	(kg)
250(3500)	23	08W-2	39-51	0.67

Ordering Code


型號說明 V2064 1 GT3 2 @ 3 # 4 * 5 D24 6 DG 7 25 8

1 Cartridge solenoid check valve
插入式電磁止回閥

V2064(08W-2) 二口二位 Poppet 2-way

2 Manifold type
油路塊總類選項

GT3:3分板管式安裝

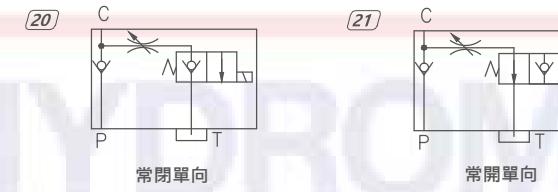3 Operation
油路方向功能選項4 Option:
with filter
附濾網裝置選項S: With Filter
有濾網 N: Without Filter
無濾網P:Push-style Manual Override
P: 推 (向外推移式) N:Option
N: 標準(輔助裝置不可調)M:Screw-out Konb Style
M:旋鈕式(開) 逆時鐘方向
Screw-in Konb Style
旋鈕式(關) 順時鐘方向T:Push and Twist Style
T:推桿附扭轉
Manual Override
固定轉動裝置5 Option:
with manual
附手動輔助裝置選項

D12: DC12V D24: DC24V A24: AC24V A11: AC110V

A22: AC220V A38: AC380V RA1:AC110V RA2:AC220V

6 Coil type
線圈型式

DG: DIN43650 DL: Lead wires(2)

插頭式 出線2條式


7 Terminations
接線方式

25: 250bar(3500psi)

8 Max pressure
最高壓力

Specifications

技術數據


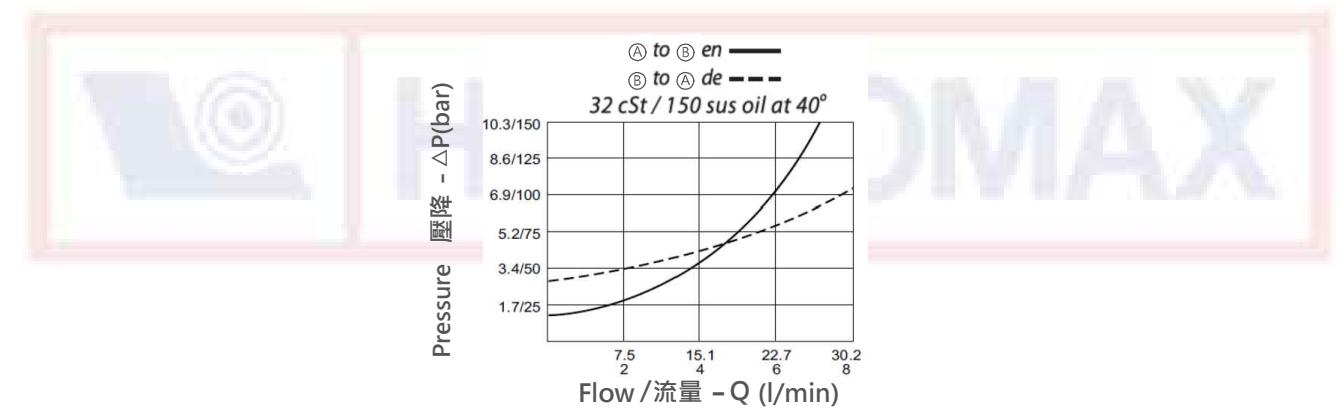


Cavity-Tooling

成型孔

○ 0.03

— 0.02

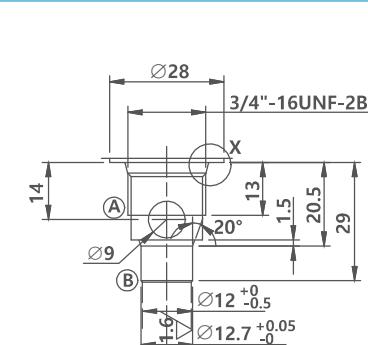

CARTRIDGE SOLENOID CHECK VALVE

插入式電磁止回閥

V2064-GT3 (HSV08)

Dimension

外型尺寸圖

Millimeters / (inch)

