


## V3033(53) (HSV10)

### Graphic Symbol

繪圖符號



### Ordering Code



型號說明

V3033 1 @ 2 # 3 \* 4 D24 5 DG 6 25 7

**1** Cartridge solenoid check valve  
插入式電磁止回閥

V3033(10W-3) 三口二位 Poppet 3-way

**2** Operation  
油路方向功能選項



**3** Option:  
with filter  
附濾網裝置選項

S: With Filter  
有濾網

N: Without Filter  
無濾網

**4** Option:  
with manual  
附手動輔助裝置選項

P: Push-style Manual Override

P: 推 (向外推移式)

M: Screw-out Konb Style

M: 旋鈕式(開) 逆時鐘方向 ↺

T: Push and Twist Style

T: 推桿附扭轉

N: Option

N: 標準(輔助裝置不可調)

Screw-in Konb Style

旋鈕式(關) 順時鐘方向 ↻

Manual Override

固定轉動裝置

**5** Coil type  
線圈型式

D12: DC12V  
A22: AC220V

D24: DC24V  
A38: AC380V

A24: AC24V  
RA1: RAC220V

A11: AC110V  
RA2: RAC220V

**6** Terminations  
接線方式

DG: DIN43650  
插頭式

DL: Lead wires(2)  
出線2條式



**7** Max pressure  
最高壓力

25: 250bar(3500psi)

### 技術參數


| Fluids-<br>Temperatures<br>使用油溫範圍 | Internal Leakage<br>最大內漏量                          | Filtration<br>過濾精度 | Minimun Voltage<br>Required<br>線圈需要的最低電壓 |
|-----------------------------------|----------------------------------------------------|--------------------|------------------------------------------|
| (°C)                              | 0.15cc/minute                                      | (um)               |                                          |
| -40~120°C                         | (3 drops/minute)max.at 250 bar<br>(3滴/每分)壓降250bar時 | 25                 | 90% of nominal<br>額定電壓的90%               |

## 技術數據

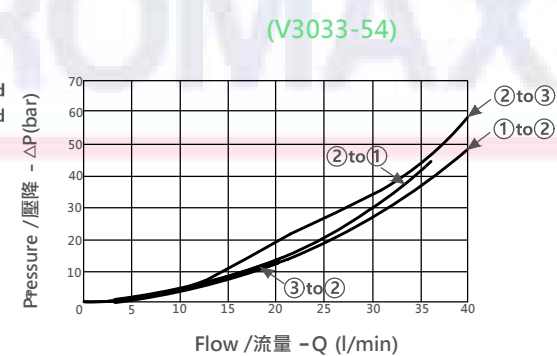

## 成型孔

*Millimeters (m/m)*

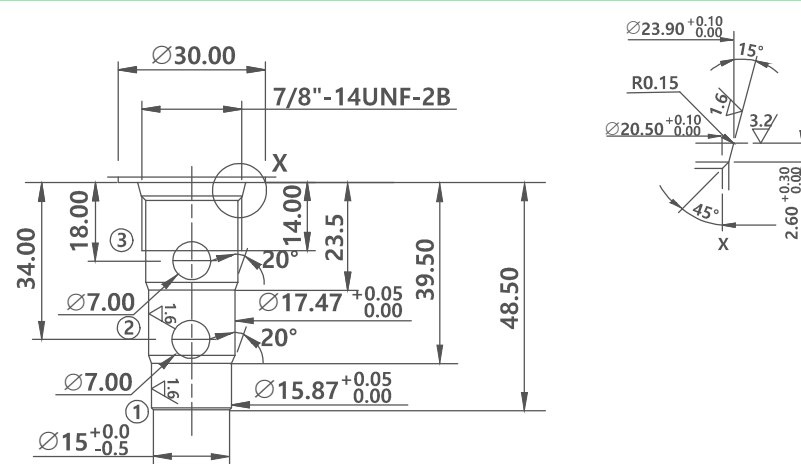

### 外型尺寸圖

Millimeters/(inch)

