

CARTRIDGE SOLENOID CHECK VALVE


插入式電磁止回閥

V3070-T03/T04/TOA (HSV10)



Graphic Symbol

繪圖符號



Ordering Code

型號說明 V3070 1 T03 2 @ 3 # 4 * 5 D24 6 DG 7 25 8


1 Cartridge solenoid check valve 插入式電磁止回閥

V3070(10W-2) 二口二位 Poppet 2-way

2 Manifold type 油路塊總類選項

T03: A&B 90° 3分管式安裝
T04: A&B 90° 4分管式安裝
TOA: A&B 180° 4分管式安裝

3 Operation 油路方向功能選項

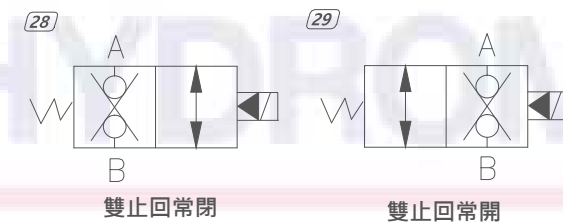

4 Option: with filter 附濾網裝置選項

S: With Filter 有濾網
N: Without Filter 無濾網

5 Option: with manual 附手動輔助裝置選項

P: Push-style Manual Override
P: 推 (向外推移式)
M: Screw-out Konb Style
M: 旋鈕式(開) 逆時鐘方向 ↺
T: Push and Twist Style
T: 推桿附扭轉

N: Option
N: 標準(輔助裝置不可調)
Screw-in Konb Style
S: 旋鈕式(開) 順時鐘方向 ↻
Manual Override
M: 固定轉助裝置

6 Coil type 線圈型式

D12: DC12V A22: AC220V
D24: DC24V A38: AC380V
A24: AC24V RA1: RAC220V
A11: AC110V RA2: RAC220V

7 Terminations 接線方式

DG: DIN43650 插頭式
DL: Lead wires(2) 出線2條式

8 Max pressure 最高壓力

25: 250bar(3500psi)

Technical Data


技術參數

Max.Operating Pressure 最高壓力	Rated Flow 額定流量	Cavity-Tooling 成型孔	Installation Torque 安裝扭矩	Weight 重量
bar(psi)	(l /min)		(Nm)	(kg)
250(3500)	38	10W-2	44-56	0.77

Fluids- Temperatures 使用油溫範圍	Internal Leakage 最大內漏量	Filtration 過濾精度	Minimum Voltage Required 線圈需要的最低電壓
(°C)	0.25cc/minute	(um)	
-40~120 °C	(5 drops/minute)max.at 250 bar (5滴/每分)壓降250bar時	25	90% of nominal 額定電壓的90%

Specifications



技術數據

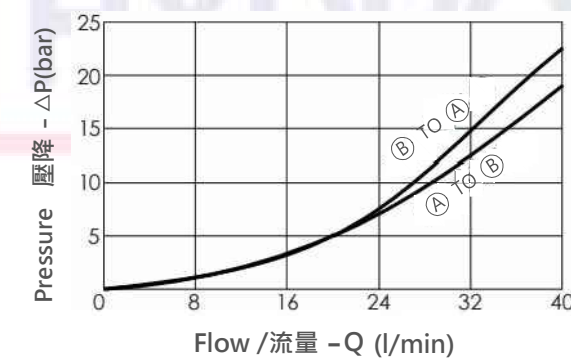

Cavity-Tooling

成型孔

Millimeters (m/m)

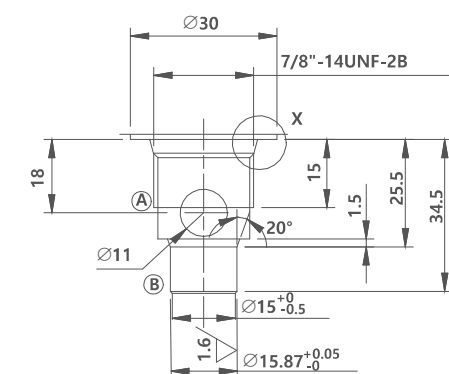

CARTRIDGE SOLENOID CHECK VALVE

插入式電磁止回閥


V3070-T03/T04/TOA (HSV10)



Dimension

外型尺寸圖


Millimeters (inch)

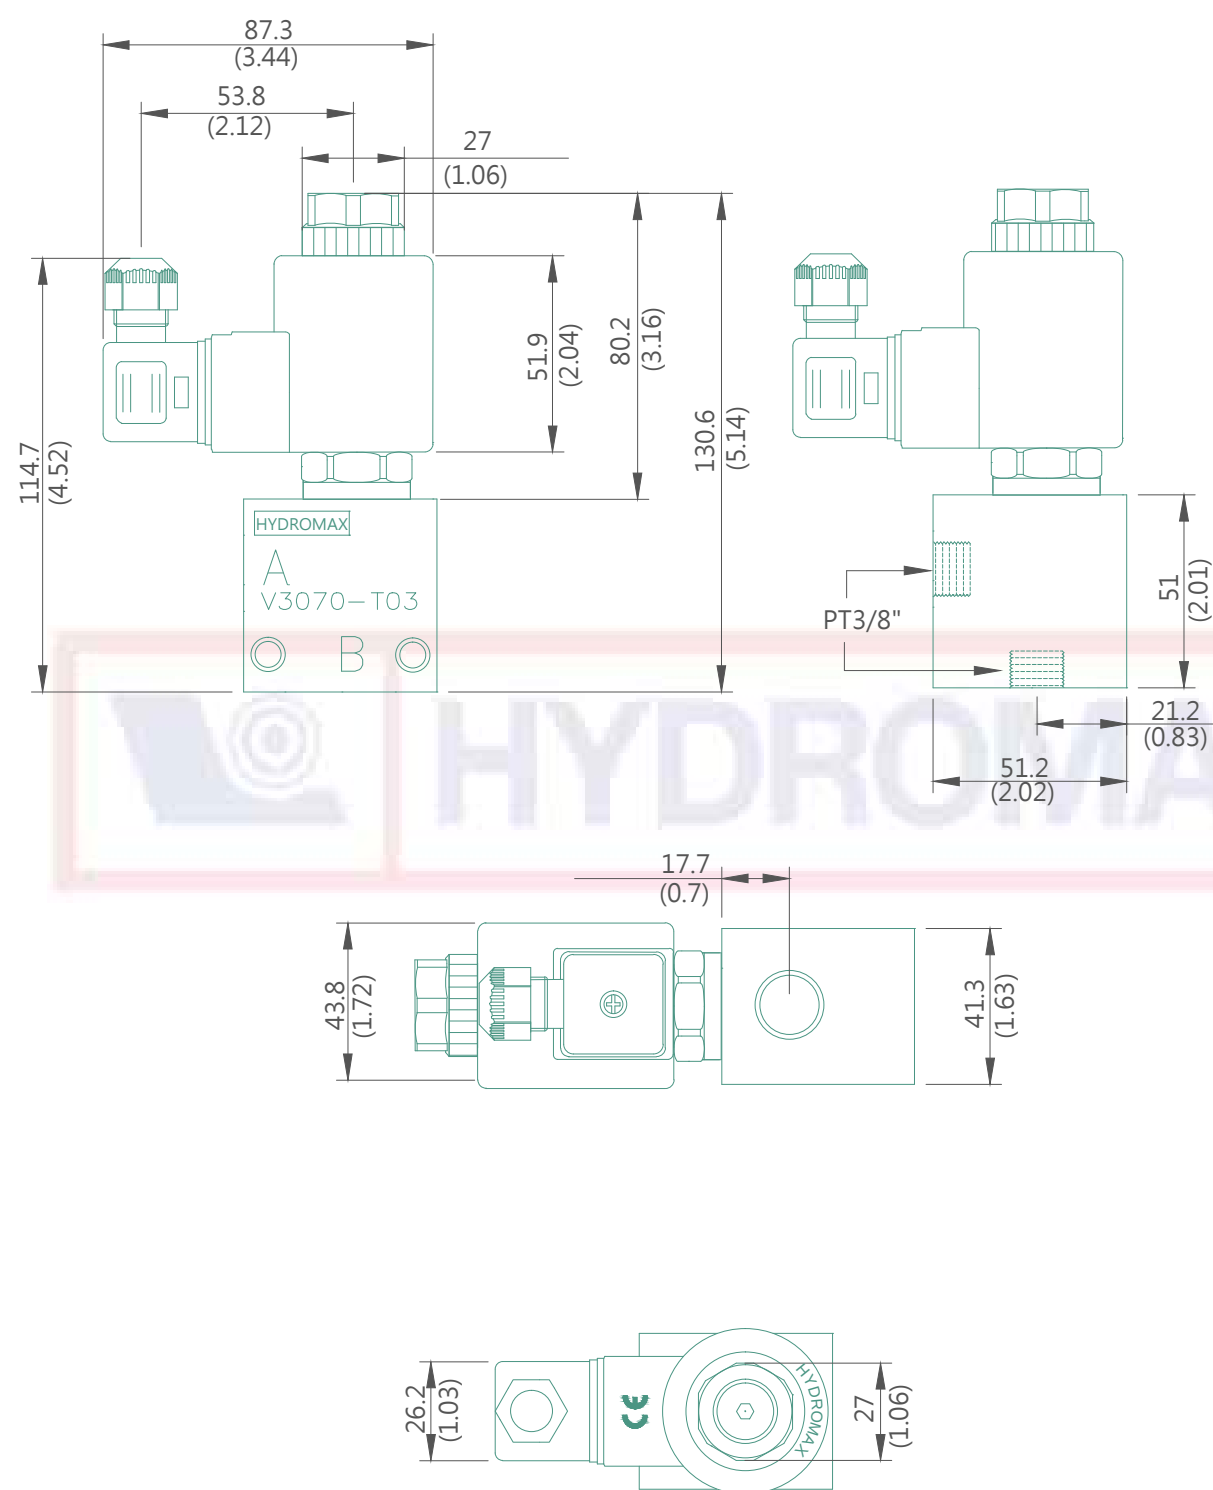

Dimension

外型尺寸圖

Millimeters (inch)

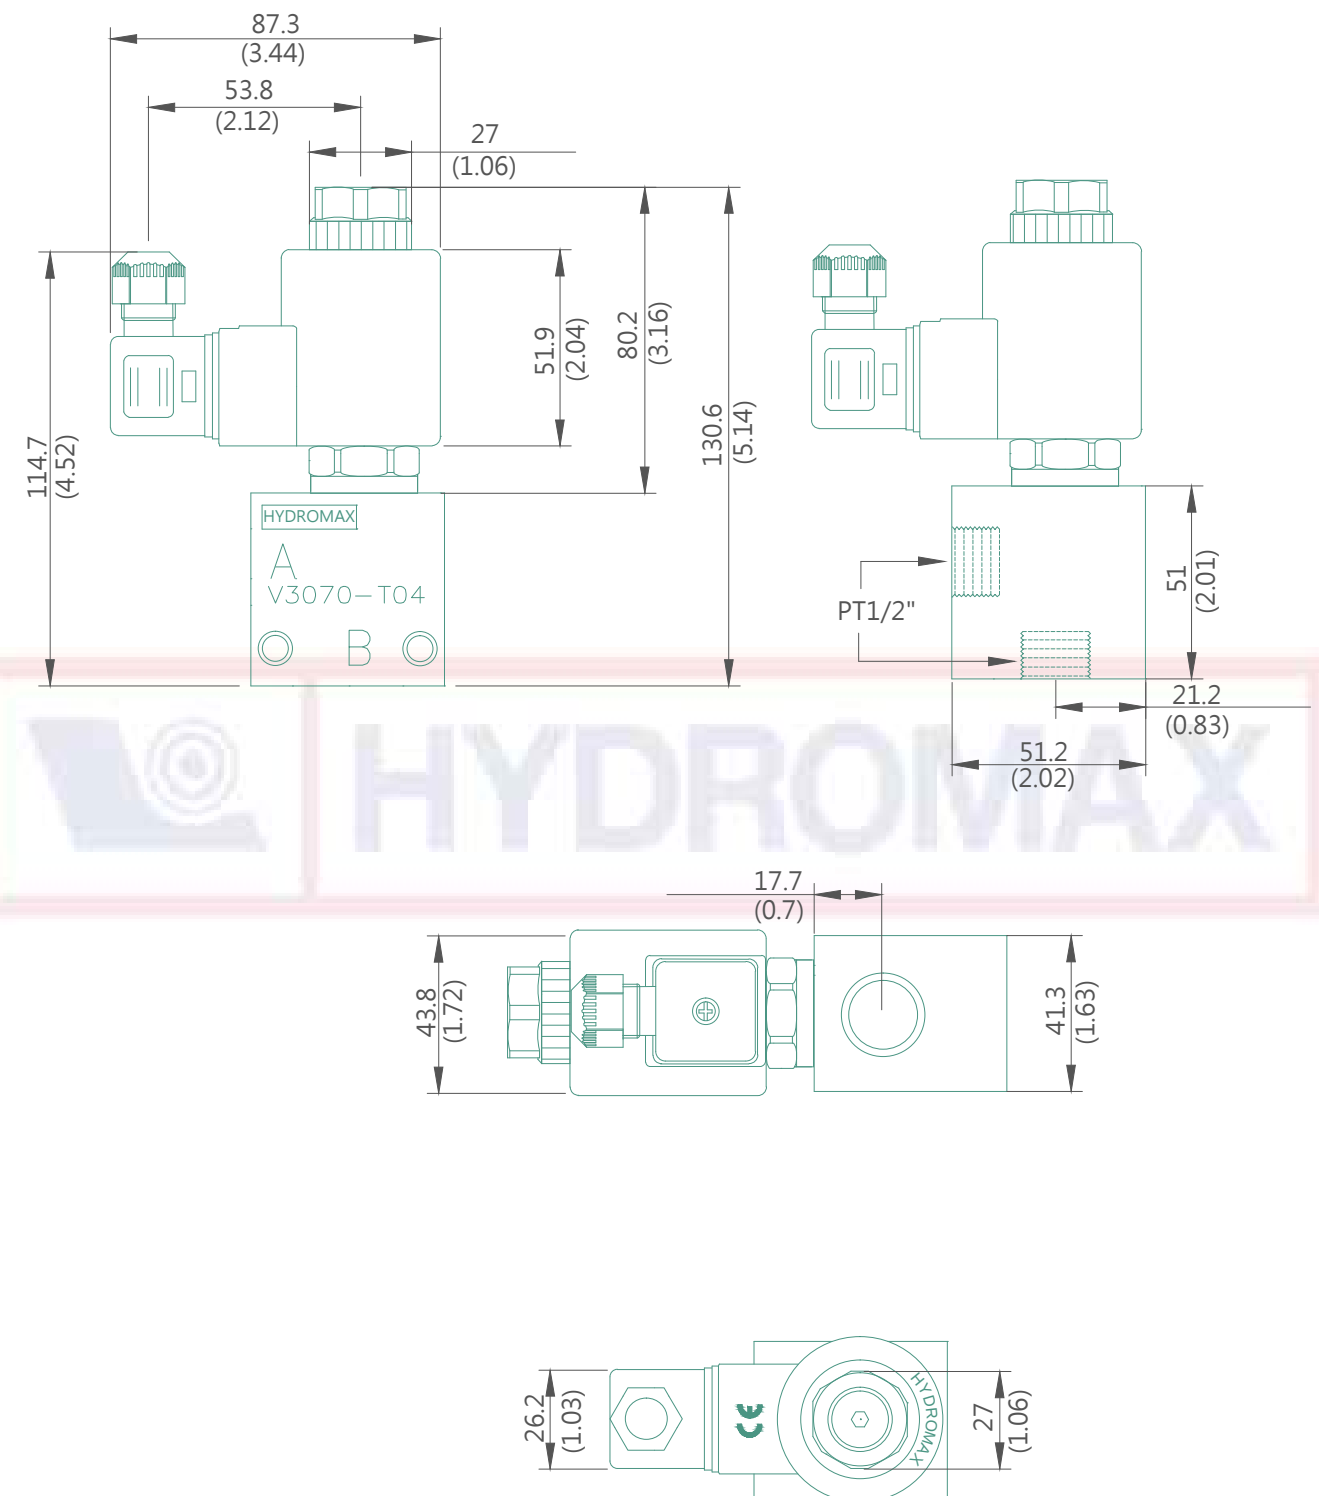

CARTRIDGE SOLENOID CHECK VALVE

插入式電磁止回閥

V3070-T03/T04/TOA (HSV10)

Dimension

外型尺寸圖

Millimeters/(inch)

